NO MOUNT

PENINSULAR® CYLINDER COMPANY


METRIC HIGH PRESSURE HYDRAULIC CYLINDER WORKING PRESSURE - 210 BAR (3000 PSI)


NOTE:

FOR OPTIONAL ROD THREADS CALL PENINSULAR. FOR OPTIONAL PROXIMITY SWITCH CALL PENINSULAR. U.S. PATENT NUMBERS: 4,726,282 AND D295,753.

*FOR PORT AND CUSHION POSITIONS REFER
TO THE HOW TO ORDER PENINSULAR IHP SERIES
HIGH PRESSURE METRIC HYDRAULIC CYLINDERS.

PENINSULAR "L"




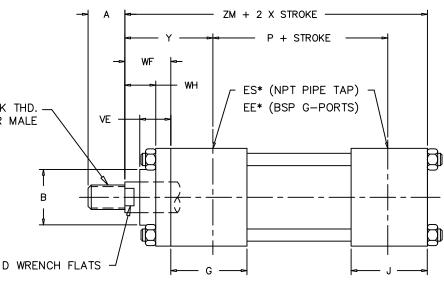

\sim
•
0
0

			STYLE SHOWN								BSP I G-PORT	NPT						DIMEN	ISIONS	IN MILLI	IMETERS	;
	BORE SIZE	ROD DIAMETER	KK THD. LONGER MALE	Α	AA	В	BB	О	DD	E	G-PORT EE	(INCHES)	G	J	Р	TG	VE	WF	WH	Y	ZM	1
ł	OILL				- ^^		- 55	_	55	-					<u>'</u>			***	••••	'		ł
١	40.0	18.0	M14 x 1.5	18.0	59.0	30.0	35.0	15.0	M8 x 1	63.0	3/8	1/2"	45.0	38.0	73.0	41.7	16.0	35.0	25.0	62.0	195.0	
ŀ		28.0	M20 x 1.5	28.0	—	42.0		22.0									22.0					-
-	50.0	22.0	M16 x 1.5	22.0		34.0	46.0	18.0	M12 x 1.25	75.0	1/2	1/2"	45.0	38.0	74.0	52.3	22.0	41.0	25.0	67.0	207.0	
١		28.0	M20 x 1.5	28.0	74.0			22.0									22.0					
ļ		36.0	M27 x 2	36.0		50.0		30.0									25.0					
-	63.0	28.0	M20 x 1.5	28.0		42.0		22.0									22.0					
١		36.0	M27 x 2	36.0	91.0	50.0	46.0 30.0	M12 × 1.25	90.0	1/2	1/2"	45.0	38.0	80.0	64.3	25.0	48.0	32.0	71.0	223.0	1	
		45.0	M33 x 2	45.0		60.0		39.0									29.0				L	$+ \ $
	80.0	36.0	M27 x 2	36.0	117.0	50.0		30.0	M16 x 1.5	115.0	3/4	3/4"	50.0	45.0	93.0	82.7	25.0	_				
		45.0	M33 x 2	45.0		60.0	59.0	39.0									29.0	51.0	31.0	77.0	246.0	
-		56.0	M42 x 2	56.0		72.0		48.0									29.0				270.0	
ſ	100.0	45.0	M33 x 2	45.0		60.0		39.0								29.0					ĺ	
١		56.0	M42 x 2	56.0	137.0	72.0	59.0	48.0	M16 x 1.5	130.0	3/4	3/4"	50.0	45.0	101.0	96.9	29.0	57.0	35.0	82.0	265.0	
١		70.0	M48 x 2	63.0	1	88.0		62.0									32.0					
İ		56.0	M42 x 2	56.0	178.0	72.0	48.0									29.0					İ	
١	125.0	70.0	M48 x 2	63.0		88.0	81.0	81.0 62.0	M22 x 1.5	165.0	1	3/4"	58.0	58.0	117.0	125.9	32.0	57.0	35.0	86.0	289.0	
١		90.0	M64 x 3	85.0		108.0											32.0					
İ	160.0	70.0	M48 x 2	63.0	219.0	88.0		62.0	M27 x 2	205.0	1	1"	58.0	58.0	130.0	154.9	32.0				302.0	İ
		90.0	M64 x 3	85.0		108.0	92.0	80.0									32.0	57.0	32.0	86.0		İ
١		110.0	M80 x 3	95.0		133.0		100.0									32.0					
İ		90.0	M64 x 3	85.0	269.0	108.0	80.0 100.0	80.0	M30 x 2	245.0	1 1/4	1 1/2"	76.0	76.0	165.0	190.2	32.0	57.0	32.0	98.0	356.0	İ
	200.0	110.0	M80 x 3	95.0		133.0		100.0									32.0					ĺ
		140.0	M100 x 3	112.0		163.0	115.0	128.0									32.0					
L																						ı





IHP 0 (MX0)

ISO 6020-2

FILE: 7.00_IHP00S2.dwg REV: 02/09/2010