




Peninsular Mill Type Cylinder Sizing Chart

- PRINT this Blank Template Page
- PRINT the APPLICATION DATA SHEET (SCROLL DOWN)
- FILL IN the Required Information on BOTH PAGES
- FAX BOTH PAGES to Peninsular at (586) 775-4545

Head Circular Flange MF3 Mount



Date Submitted: _____ No. of Pages _____
 Name: _____
 Company: _____
 Phone: _____
 Fax: _____
 Email: _____

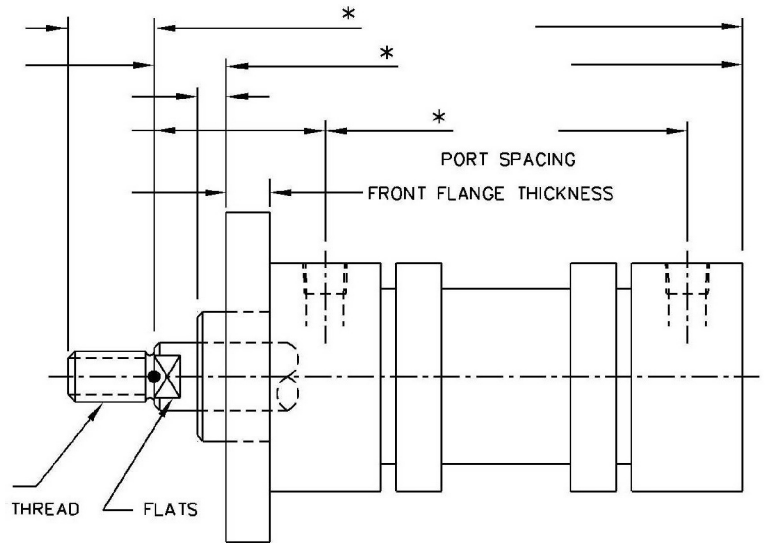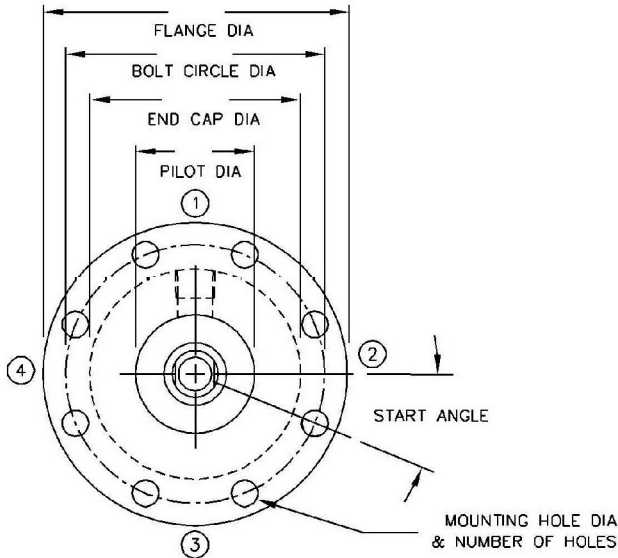

ABOVE: Fill in actual Cylinder Dimensions. **BELOW:** Check ALL Applicable Boxes & provide ALL INFORMATION to best describe the Cylinder

- AIR CYLINDER - Indicate Working Pressure: _____
 HYDRAULIC CYLINDER - High Pressure
 HYDRAULIC CYLINDER - Low Pressure

If Hydraulic - Indicate Working Pressure: _____
 If Hydraulic - Indicate Maximum Rated Pressure: _____
 If Hydraulic - Indicate Fluid Type: _____

Is the Cylinder an "INCH" Cylinder? Yes No
 Is the Cylinder METRIC? Yes No
 if METRIC, specify Standard: _____

SAFETY FACTOR Required: _____
 End Cap STYLE: Welded Threaded Snap Ring
 Cylinder TUBE MATERIAL: _____
 Cylinder END CAP MATERIAL: _____
 Are GREASE FITTINGS Required? Yes No
 BORE Size: _____ STROKE Length: _____

PISTON ROD DIAMETER: _____ PISTON ROD THREADS: Male Female Other (Describe): _____

Specify PISTON ROD THREAD DIAMETER, PITCH & LENGTH (example: 3/4" - 16 x 1.125") : _____

PORT THREAD TYPE: NPT SAE (O-Ring) SAE Four Bolt Flange PORT THREAD SIZE (Specify): _____

Does the Cylinder have OPTIONAL CUSHION(s)? No on BOTH End Caps the FRONT END CAP Only the REAR END CAP Only

Indicate Existing Cylinders MANUFACTURER & MODEL NUMBER : _____

Is a Cylinder ACCESSORY Required? (ex. a Rod Clevis) : No Yes (indicate the type of Accessory _____ & provide Dimensions on Page 10)

Indicate any other Special Cylinder Features if applicable. If available, provide Sketches, Engineering Drawings and Photographs of the Cylinder. If applicable, indicate the Mode of Cylinder Failure, Harsh Environmental Factors, Electronic Positioning Devices or any other Pertinent Information regarding the existing Cylinder. For any questions, please call Peninsular Inside Sales at 1-800-526-7968.

Referencing the diagram below, indicate the **SIDE LOCATION #** for PORTS and/or Optional CUSHION ADJUSTMENT SCREWS for both the FRONT & REAR End Caps


FRONT End Cap

- The PORT (Hydraulic or Air) is located on FRONT End Cap SIDE LOCATION #s: _____
- The CUSHION ADJUSTMENT SCREW (an Optional Feature) is located on FRONT End Cap SIDE LOCATION #: _____

REAR End Cap

- The PORT (Hydraulic or Air) is located on REAR End Cap SIDE LOCATION #s: _____
- The CUSHION ADJUSTMENT SCREW (an Optional Feature) is located on REAR End Cap SIDE LOCATION #: _____

End Cap Port / Cushion Adjustment Screw SIDE LOCATION # Diagram

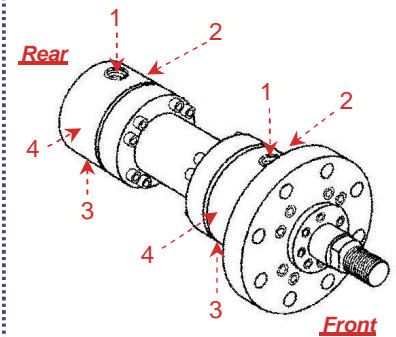

Always view the Cylinder through the Rod End from the Front End Cap side of the Cylinder

