METRIC HIGH PRESSURE HYDRAULIC CYLINDER LARGE BORE SERIES - ISO 6020-3 WORKING PRESSURE - 160 BAR (2320 PSI)


RATED PRESSURE - 250 BAR (3625 PSI)


PENINSULAR "M"

NOTE:

FOR OTHER ROD END THREADS, REFER TO THE HOW TO ORDER SERIES IHP HIGH PRESSURE HYDRAULIC CYLINDERS (LARGE BORE SERIES) INFORMATION GUIDE. FOR SENSING OPTIONS CONTACT PENINSULAR.

*FOR PORT AND CUSHION POSITIONS, REFER TO THE HOW TO ORDER SERIES IHP HIGH PRESSURE HYDRAULIC CYLINDERS (LARGE BORE SERIES) INFORMATION GUIDE.

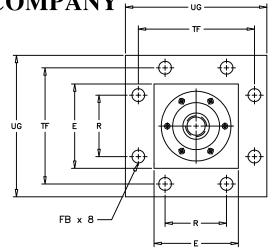

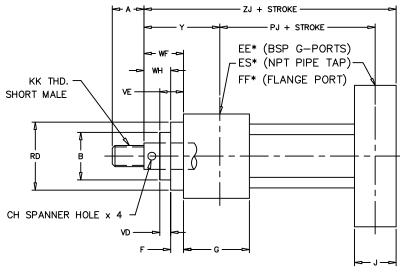

		STYLE SHOWN					G	NPT	FLANGE												DIMEN	CIONC	IKI MILI	IMETERS
BORE	ROD	KK THD.					PORT	(INCHES)	PORT												DIMEN	310113	IIN WILL	METERS
SIZE	DIAMETER	SHORT MALE	Α	B f9	СН	E	EE	ES	FF **	F	FB	G	J	PJ	R	RD f8	TF	UG	VD	VE	WF	WH	Y	ZJ
250	140.0	M100 x 3	112.0	163.0	15.0	320.0	1 1/2"	2"	DN 51	25.0	30.0	94.0	94.0	216.0	235.0	280.0	380.0	445.0	58.0	83.0	110.0	85.0	157.0	420.0
	160.0	M110 x 3	112.0	185.0																				
	180.0	M125 x 4	125.0	205.0																				
320	180.0	M125 x 4	125.0	205.0	15.0	400.0	1 1/2"	2 1/2"	DN 64	35.0	36.0	114.0	114.0	251.0	283.0	325.0	472.0	549.0	48.0	83.0	110.0	75.0	167.0	475.0
	200.0	M140 x 4	140.0	225.0																				
	220.0	M160 x 4	160.0	245.0																				
360	180.0	M125 x 4	125.0	205.0	15.0	450.0	2"	2 1/2"	DN 64	42.0	39.0	124.0	124.0	296.0	305.0	350.0	528.0	611.0	41.0	83.0	110.0	68.0	172.0	530.0
	220.0	M160 x 4	160.0	245.0																				
	250.0	M180 x 4	180.0	275.0																				
400	220.0	M160 x 4	160.0	245.0	15.0	500.0	2"	2 1/2"	DN 64	50.0	45.0	150.0	150.0	320.0	340.0	380.0	588.0	683.0	33.0	83.0	110.0	60.0	185.0	580.0
	250.0	M180 x 4	180.0	275.0																				
	280.0	M200 x 4	200.0	305.0																				
500	280.0	M200 x 4	200.0	305.0	15.0	630.0	2"	2 1/2"	DN 64	70.0	56.0	200.0	200.0	400.0	425.0	490.0	740.0	858.0	13.0	83.0	110.0	40.0	210.0	710.0
	320.0	M220 x 4	220.0	345.0																				
	360.0	M250 x 6	250.0	385.0																				

IHP 18 (MF6)

ISO 6020-3

** PER ISO 6162