

CAP RECTANGULAR BLOCK FLANGE



PENINSULAR® CYLINDER COMPANY

METRIC HIGH PRESSURE HYDRAULIC CYLINDER
WORKING PRESSURE – 210 BAR (3000 PSI)

NOTE:


FOR OPTIONAL ROD THREADS CALL PENINSULAR.
FOR OPTIONAL PROXIMITY SWITCH CALL PENINSULAR.
U.S. PATENT NUMBERS: 4,726,282 AND D295,753.

*FOR PORT AND CUSHION POSITIONS REFER
TO THE HOW TO ORDER PENINSULAR IHP SERIES
HIGH PRESSURE METRIC HYDRAULIC CYLINDERS.

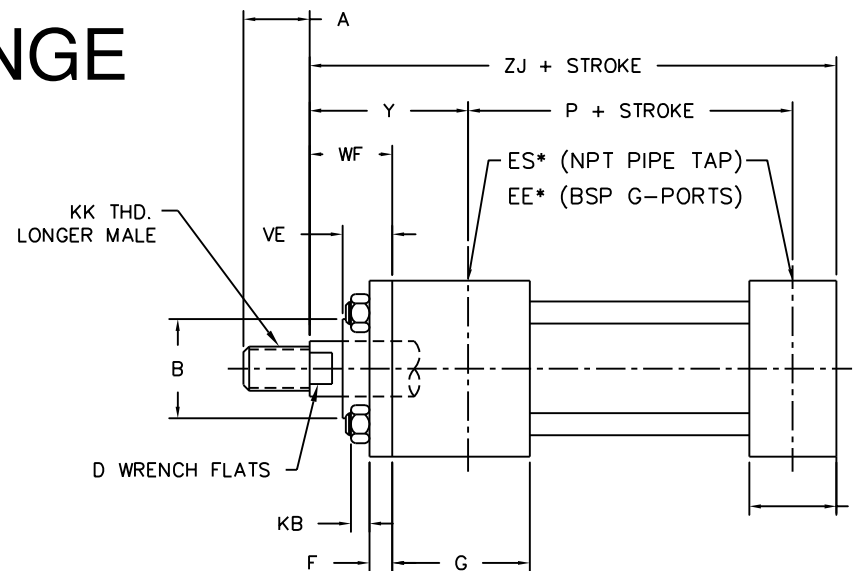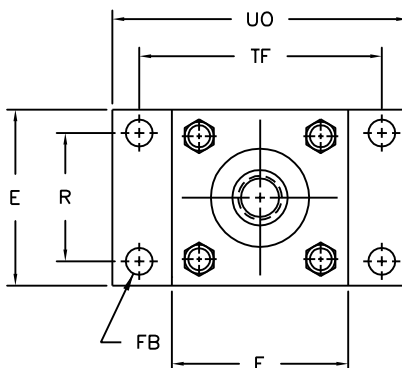

PENINSULAR "L"
STYLE SHOWN

BORE SIZE	SIZE SHOWN							BSP G-PORT		NPT (INCHES)		DIMENSIONS IN MILLIMETERS											
	ROD DIAMETER	KK THD. LONGER MALE	A	B	D	E	EE	ES	F	FB	G	J	KB	P	R	TF	UO	VE	WF	Y	ZJ		
40.0	18.0	M14 x 1.5	18.0	30.0	15.0	63.0	3/8	1/2"	10.0	11.0	45.0	38.0	6.5	73.0	41.0	87.0	110.0	16.0	35.0	62.0	153.0		
	28.0	M20 x 1.5	28.0	42.0	22.0													22.0					
50.0	22.0	M16 x 1.5	22.0	34.0	18.0	75.0	1/2	1/2"	16.0	14.0	45.0	38.0	10.0	74.0	52.0	105.0	130.0	22.0	41.0	67.0	159.0		
	28.0	M20 x 1.5	28.0	42.0	22.0													22.0					
	36.0	M27 x 2	36.0	50.0	30.0													25.0					
63.0	28.0	M20 x 1.5	28.0	42.0	22.0	90.0	1/2	1/2"	16.0	14.0	45.0	38.0	10.0	80.0	65.0	117.0	145.0	22.0	48.0	71.0	168.0		
	36.0	M27 x 2	36.0	50.0	30.0													25.0					
	45.0	M33 x 2	45.0	60.0	39.0													29.0					
80.0	36.0	M27 x 2	36.0	50.0	30.0	115.0	3/4	3/4"	20.0	18.0	50.0	45.0	13.0	93.0	83.0	149.0	180.0	25.0	51.0	77.0	190.0		
	45.0	M33 x 2	45.0	60.0	39.0													29.0					
	56.0	M42 x 2	56.0	72.0	48.0													29.0					
100.0	45.0	M33 x 2	45.0	60.0	39.0	130.0	3/4	3/4"	22.0	18.0	50.0	45.0	13.0	101.0	97.0	162.0	200.0	29.0	57.0	82.0	203.0		
	56.0	M42 x 2	56.0	72.0	48.0													29.0					
	70.0	M48 x 2	63.0	88.0	62.0													32.0					
125.0	56.0	M42 x 2	56.0	72.0	48.0	165.0	1	3/4"	22.0	22.0	58.0	58.0	18.0	117.0	126.0	208.0	250.0	29.0	57.0	86.0	232.0		
	70.0	M48 x 2	63.0	88.0	62.0													32.0					
	90.0	M64 x 3	85.0	108.0	80.0													32.0					
160.0	70.0	M48 x 2	63.0	88.0	62.0	205.0	1	1"	25.0	26.0	58.0	58.0	22.0	130.0	155.0	253.0	300.0	32.0	57.0	86.0	245.0		
	90.0	M64 x 3	85.0	108.0	80.0													32.0					
	110.0	M80 x 3	95.0	133.0	100.0													32.0					
200.0	90.0	M64 x 3	85.0	108.0	80.0	245.0	1 1/4	1 1/2"	25.0	33.0	76.0	76.0	24.0	165.0	190.0	300.0	360.0	32.0	57.0	98.0	299.0		
	110.0	M80 x 3	95.0	133.0	100.0													32.0					
	140.0	M100 x 3	112.0	163.0	128.0													32.0					



IHP 29 (ME6)

ISO 6020-2