


PENINSULAR CYLINDER CO.

Model LM - NFPA Medium Duty Aluminum Air Cylinders

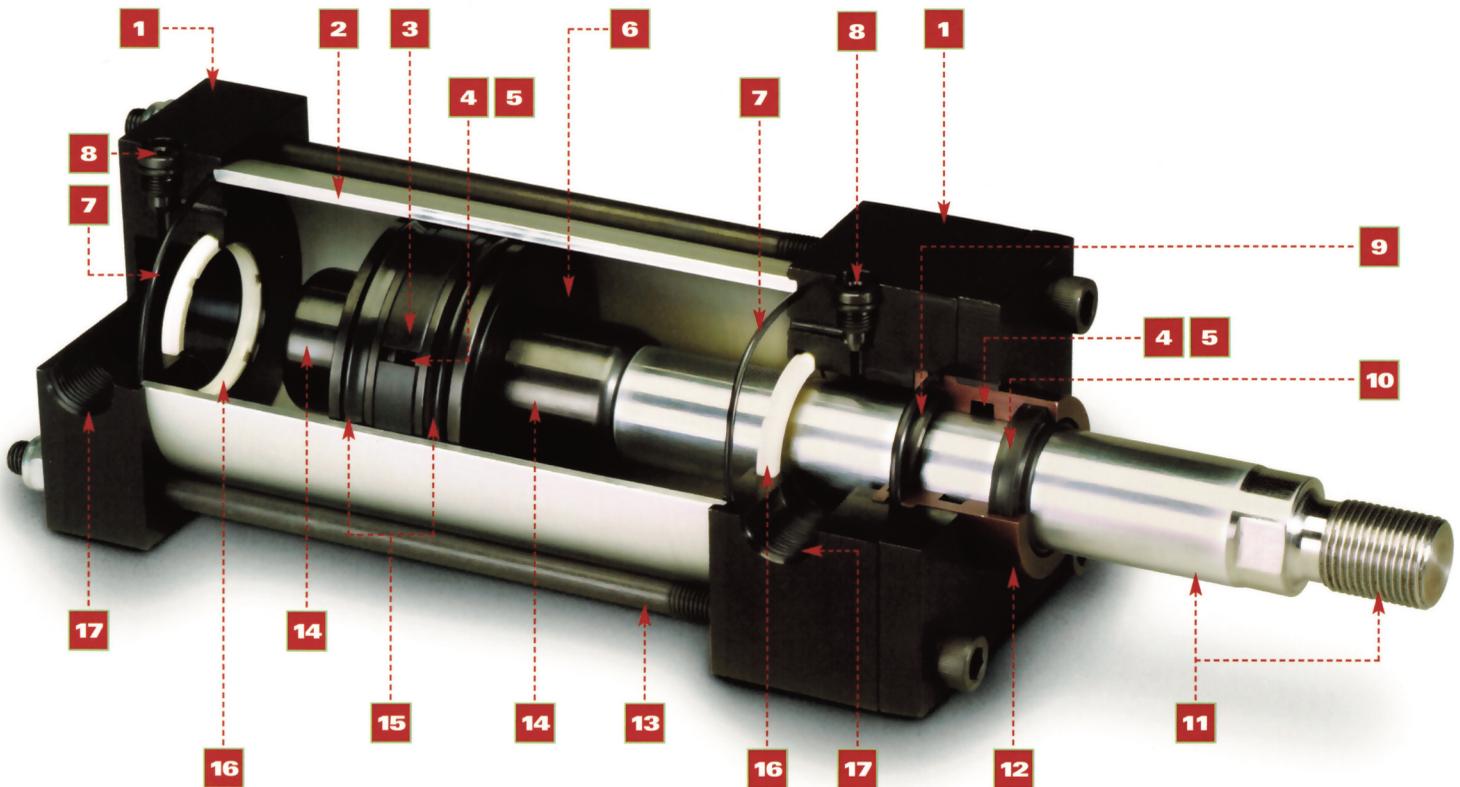

FEATURES

ADVANTAGES

BENEFITS

1. Heads & Caps

Square, precision-machined 6061-T6 anodized aluminum or painted.

Corrosion resistant. Assures concentricity of tube, bearing, cushion and piston rod. Can be made proximity switch ready to accept same probe-length switches at each end without spacers.

2. Cylinder Tube

Solid 6061-T6 aluminum tube; precision honed to 12/15 micro inch finish; hard coat anodized .001" thick on both ID and OD.

Hard Coating resists wear and corrosion; also reduces wear on piston seals.

3. Wear Band

Precision wear band made of composite material.

Offers low friction, long lasting wear surface which prevents scoring of cylinder tube inner wall.

800-526-7968

27650 Groesbeck Highway • Roseville, MI 48066

Local: 586-775-7211 • Fax: 586-775-4545 • www.peninsularcylinders.com • sales@peninsularcylinders.com



4. Lubrication Reservoirs

Located underneath wear band inside piston and also inside the bearing cartridge.

Provides effective way of metering maximum amount of lubricant to all areas over a long time period. Not subject to air turbulence and contamination.

5. Lubricant
(Not Shown)

Teflon™ based grease

Long lasting lubrication of piston seals, inner cylinder wall surface, bearing cartridge ID, rod seal and rod wiper.

6. Piston

One-piece steel, black oxidized with uniform cushion hubs on both sides, threaded onto piston rod, staked and secured with thread locker.

Prevents rusting and air leakage; anchored onto piston rod with minimum undercut providing maximum strength. Additional pinning onto rod optional. Aluminum piston required for magnetic piston sensing - see #19.

7. Tube Seals

Buna-N Nitrile axial placed O-Rings.

When combined with accurately torqued tie rods, prevents extrusion of seal and air leaks under pressure

8. Cushion Adjustment Screw

Steel needle valve with Buna-N Oring sealed screw, held captive with locking snap ring.

Accurate fine adjustment of cushioning speed; no air leakage and safe for all users due to internal captive screw.

9. Rod Seal

80 durometer, rounded lip, prelubricated, carboxylated nitrile cup style.

Disperses grease throughout ID of rod cartridge extending seal life within. Resists abrasion; significantly increases life and prevents leakage around piston rod.

10. Rod Wiper

80 durometer, sharp double lip, prelubricated, carboxylated nitrile seal provides additional sealing benefit beyond the rod seal.

Inside seal edge always lubricated extends life significantly, prevents dirt and grit from entering bearing cartridge and cylinder.

11. Piston Rod

High yield strength steel, case hardened OD to 50-55 Rc. Core hardness to 28-34 Rc. Hard chrome plated .0003/.0005" thick and polished to 12/15 micro inch finish.

Resists wear and provides positive connections to existing machine components. Solid male threads contain a radiused undercut to minimize rod end breakage.

12. Bearing Cartridge

Floating, self-aligning in either ductile iron or SAE 660 bronze with internal lubrication reservoir. Special "Slip Tuff" coated cartridge is also available for heavy side loaded applications. Retained by plate with cap screws; strong and shock resistant. A Buna-N O-ring located around the cartridge OD prevents leakage.

Float condition minimizes piston rod misalignment by reducing side loading. ID of bearing cartridge, rod seal and rod wiper lubricated on each stroke, reducing wear. Easily removed for maintenance without special tools to disassemble cylinder. Optional "Slip Tuff" bearing provides lubricious wear surface with hardness characteristics that significantly reduce galling and bearing cartridge failure under severe side loaded operating conditions.



800-526-7968

27650 Groesbeck Highway • Roseville, MI 48066

Local: 586-775-7211 • Fax: 586-775-4545 • www.peninsularcylinders.com • sales@peninsularcylinders.com



<p>13. Tie Rods</p>	<p>Made from 100,000 psi minimum yield, stress-proof, medium carbon steel with rolled threads at each end.</p>	<p>Provides maximum strength for connecting cylinder mounts and used with lock nuts to prevent loosening in service. Accurate torquing prevents leaks at tube seals.</p>
<p>14. Cushion Hubs</p>	<p>Steel with 8/12 micro inch finish RMS. Black oxide to prevent rusting and corrosion. Steel material permits the use of in-port cylinder head mounted proximity switches.</p>	<p>Uniform size on each side of piston to eliminate different cushion seals and reduce spare parts inventory. Smooth surface stops cushion seal wear and provides air-tight accurate operation. Ideal for proximity switch applications.</p>
<p>15. Piston Seals</p>	<p>80 durometer, rounded lip, prelubricated, carboxylated nitrile U cups.</p>	<p>Resists abrasion; when used with Peninsular's internal lubrication system, provides considerably less wear and increases operating life.</p>
<p>16. Cushion Seals</p>	<p>90 durometer floating check type Urethane seals eliminate ball checks and related parts.</p>	<p>Low friction breakaway and airtight cushioning assures smooth maximum effectiveness.</p>
<p>17. Ports</p>	<p>NPT standard, SAE O-ring optional. Metric and other thread size options.</p>	<p>Universally adaptable to any hose or fitting.</p>
<p>18. Optional Proximity Switch Capability <i>(Not Shown)</i></p>	<p>Allows for non-contact piston position sensing at near end of stroke. Precision machined cylinder heads and piston cushion hubs allow for in-port mounting of "RF inductive" proximity switches using the same switch probe length at each cylinder end without shims or spacers underneath the switch.</p>	<p>Self-contained switch probe not subject to contamination.</p>
<p>19. Optional Piston Magnet <i>(Not Shown - Under Wearband)</i></p>	<p>Tie-rod mounted reed switches can sense high gauss, shunted "rare-earth material" magnet, anywhere along the cylinder stroke. Stronger magnetism outside of the cylinder tube insures actuation of the reed switch.</p>	<p>Tie-rod mounted reed switches sense strong magnetic field provided by shunted magnet in aluminum piston, allowing piston rod location to be determined wherever external switches are placed.</p>



800-526-7968

27650 Groesbeck Highway • Roseville, MI 48066

Local: 586-775-7211 • Fax: 586-775-4545 • www.peninsularcylinders.com • sales@peninsularcylinders.com

