


CLEVIS BRACKET


PENINSULAR[®] CYLINDER COMPANY

METRIC HIGH PRESSURE HYDRAULIC CYLINDER ACCESSORIES
 LARGE BORE SERIES – ISO 6020-3
 WORKING PRESSURE – 160 BAR (2320 PSI)
 RATED PRESSURE – 250 BAR (3625 PSI)

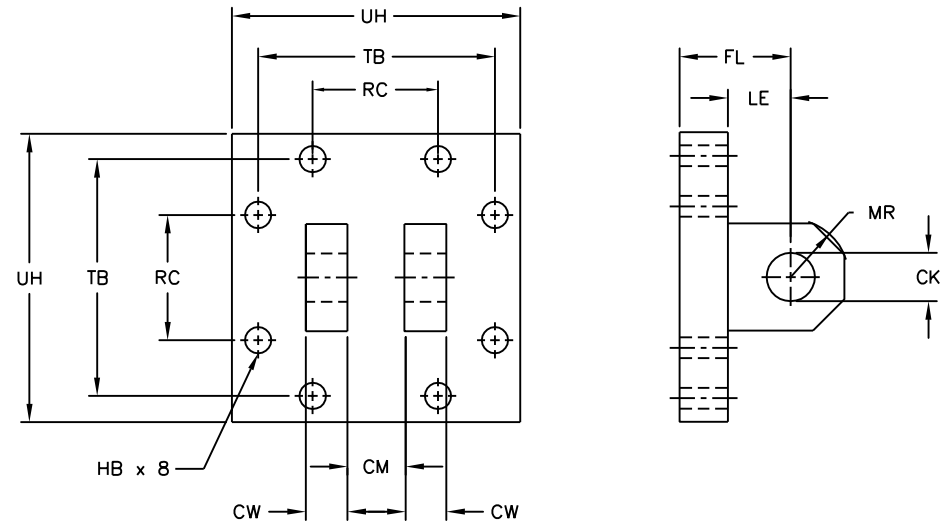

DIMENSIONS IN MILLIMETERS

| ORDER NUMBER | TYPICAL BORE DIAMETER | TYPICAL PIN DIAMETER | NOMINAL FORCE (N) | CK H9 | CM A16 | CW | FL JS14 | HB H13 | LE (MIN) | MR (MAX) | RC JS14 | TB JS14 | UH |
|--------------|-----------------------|----------------------|-------------------|-------|--------|------|---------|--------|----------|----------|---------|---------|-------|
| IHP250-78 | 250 | 90.0 | 800 000 | 90.0 | 90.0 | 45.0 | 170.0 | 30.0 | 125.0 | 100.0 | 155.0 | 260.0 | 320.0 |
| IHP320-78 | 320 | 110.0 | 1 250 000 | 110.0 | 110.0 | 55.0 | 200.0 | 36.0 | 150.0 | 120.0 | 186.0 | 320.0 | 400.0 |
| IHP360-78 | 360 | 125.0 | 1 600 000 | 125.0 | 125.0 | 62.5 | 235.0 | 39.0 | 175.0 | 140.0 | 221.5 | 365.0 | 450.0 |
| IHP400-78 | 400 | 140.0 | 2 000 000 | 140.0 | 140.0 | 70.0 | 265.0 | 45.0 | 195.0 | 160.0 | 252.5 | 410.0 | 500.0 |
| IHP500-78 | 500 | 180.0 | 3 200 000 | 180.0 | 180.0 | 90.0 | 325.0 | 56.0 | 250.0 | 200.0 | 316.0 | 515.0 | 630.0 |



CLEVIS BRACKET ACCESSORY MOUNTING DIMENSIONS ARE NOT CURRENTLY DEFINED IN ISO 13726 ACCESSORIES ARE DESIGNED FOR, BUT NOT LIMITED TO, ISO 6020-3 HYDRAULIC CYLINDERS